



HBOX[®]



HBOX is an over-the-door iris-based identity management system. Our flexible design accommodates multiple mounting environments from mobile stands, fixed frames and wall mounts to new construction and existing retrofit configurations.

HBOX throughput delivers up to 50 people per minute and is ideal for environments such as airports, stadiums and construction sites. The device easily integrates with all industry standard access control platforms and serves as an electronic physical access control system.


The robust HBOX system hardware is complemented by SAMBI[®] (biometric acquisition) and BioTag[®] (biometric matching) software, delivering a self-contained end-to-end solution.

Features:

- Ability to store user records in memory
- Enrollment & Matching "On Board"
- Video Based Iris Capture
- Connects via Wiegand, F/2/F, Relay and Ethernet for simple integration with all existing platforms

Specifications:

Throughput	Up to 50 people per minute.
Standoff Distance	46" (1.17m)
Vertical Capture Range	20" (0.51m)
Horizontal Capture Range	8.0" (0.20m)
Acquisition Speed	Person moving at 1m per second.
Biometrics	Proprietary Iris Recognition
Iris Resolution	Iris (110 px)
Network Interface	IEEE 802.3 Ethernet 10/100
Power Requirements	300W AC Adapter 110 – 240 VAC
Dimensions (WxHxD)	60.53"x13.25"x18.2" (153.75cm x 33.66cm x 46.22cm)

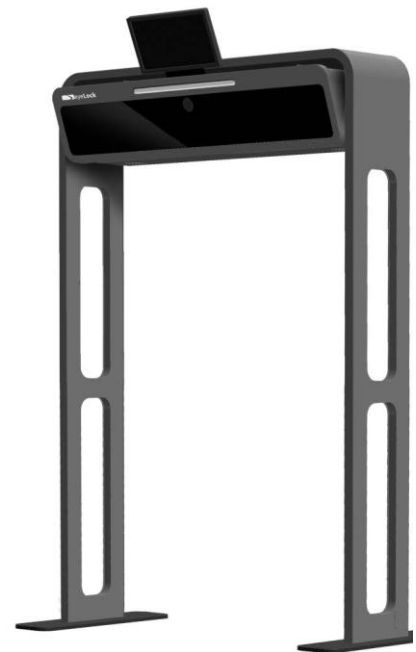

eyeLock[®]
Advanced Iris Identity Authentication